

AIR COOLED SERIES

AE-24

TIGZONE®
TORCHES



TIGZONE AE-24 – aircooled TIG-Torch

The Torch

Innovative torch profile, especially in limited-access areas.
75mm and 120mm flex-neck option.

The End-Connector

Available for all standard welding machines

The Handle

3 Different handle and switch options


The Cable

Super-Flex® cables and Super-Soft® leather remains
flexible and ease to handle with a significant cable lifetime

DIN Norm

CE EN 60 974-7

TIGZONE AE-24 – Torch / Back End Consumables

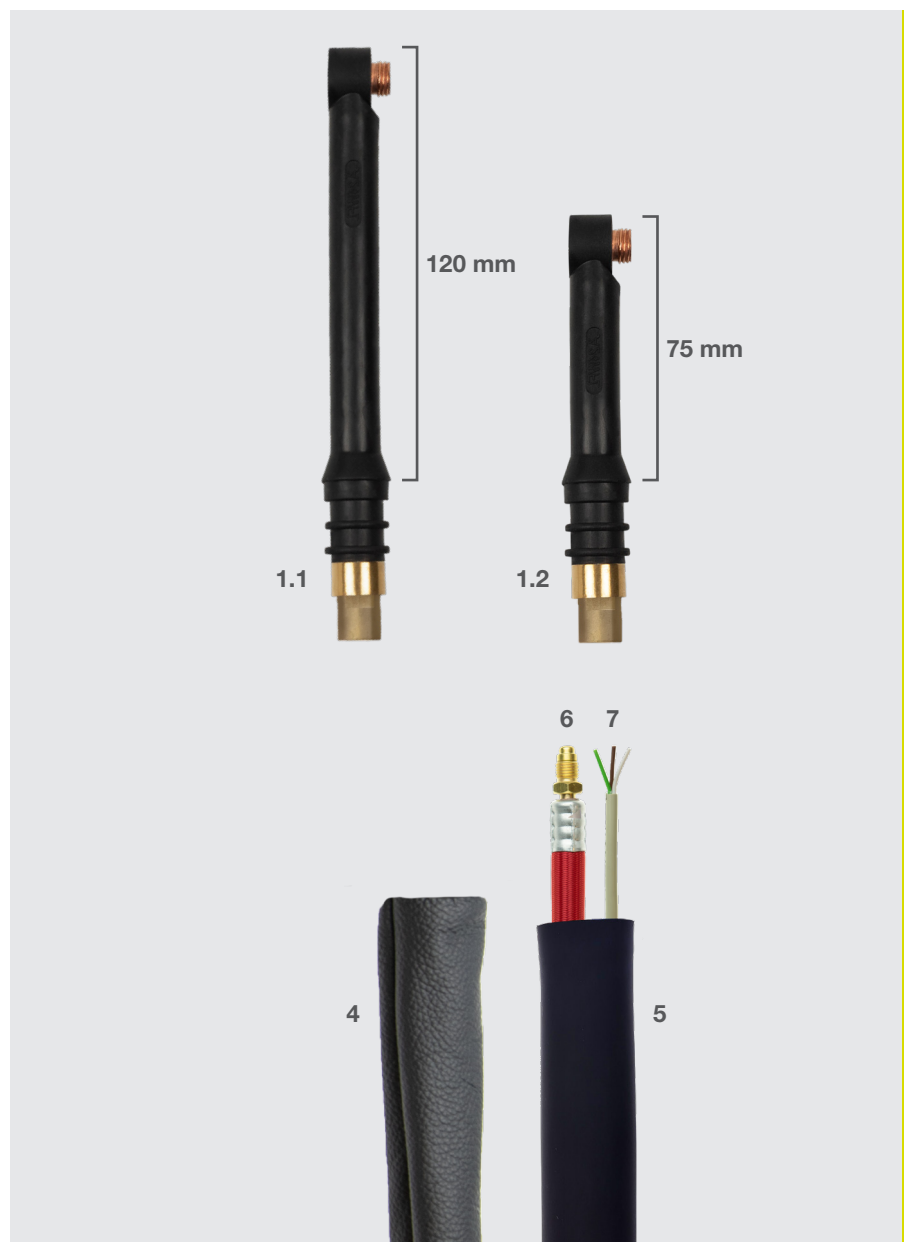

Torch Front Group

1	Torch Body incl. insulator (10)	
.1	AE-24GF 120mm	AE24GF
.2	AE-24GFS 75mm	AE24GFS

Cable Group

4	Cable cover leather		TZ-1022R-TIG
5	Cable cover 22x1.5mm		RS-22
6	Power Cable		
	4m		57Y01R-*
	4m SF		57Y01R-SF-*
	8m		57Y03R-*
	8m SF		57Y03R-SF-*
7	Control		MOQ 100m
	Standard (3x0.5mm)		LIYY-3x0,5
	U/D Torches (6x0.25mm)		LIYCY-6x0,25

* Please specify machine connections e.g. **1/4, 3/8** etc.

i Handles

More information regarding our **Handles** Group on page 2.

Size	10 Insulator	11 Collet	12 Gas Lens	13 Cup #6 Ø 9.52 mm
Ø .020" (0.5 mm)	-	-	-	-
Ø .040" (1.0 mm)	-	-	-	-
Ø 1/16" (1.6 mm)	-	-	-	-
Ø 3/32" (2.4 mm)	-	-	-	-
Ø 1/8" (3.2 mm)	-	-	-	-
	598882M	13N21JA 13N22JA 13N23JA 13N24JA	45V42MS 45V43MS 45V44MS 45V45MS	53N60ES