

WATER COOLED SERIES

AQ-24WF

TIGZONE®
TORCHES



TIGZONE AQ-24WF – watercooled TIG-Torch

The Torch

Innovative torch profile, especially in limited-access areas.
75mm and 120mm flex-neck option

The End-Connector

Available for all standard welding machines

The Handle

3 Different handle and switch options


The Cable

Super-Flex® cables and Super-Soft® leather remains
flexible and ease to handle with a significant cable lifetime

DIN Norm

CE EN 60 974-7

TIGZONE AQ-24WF – Torch / Back End Consumables

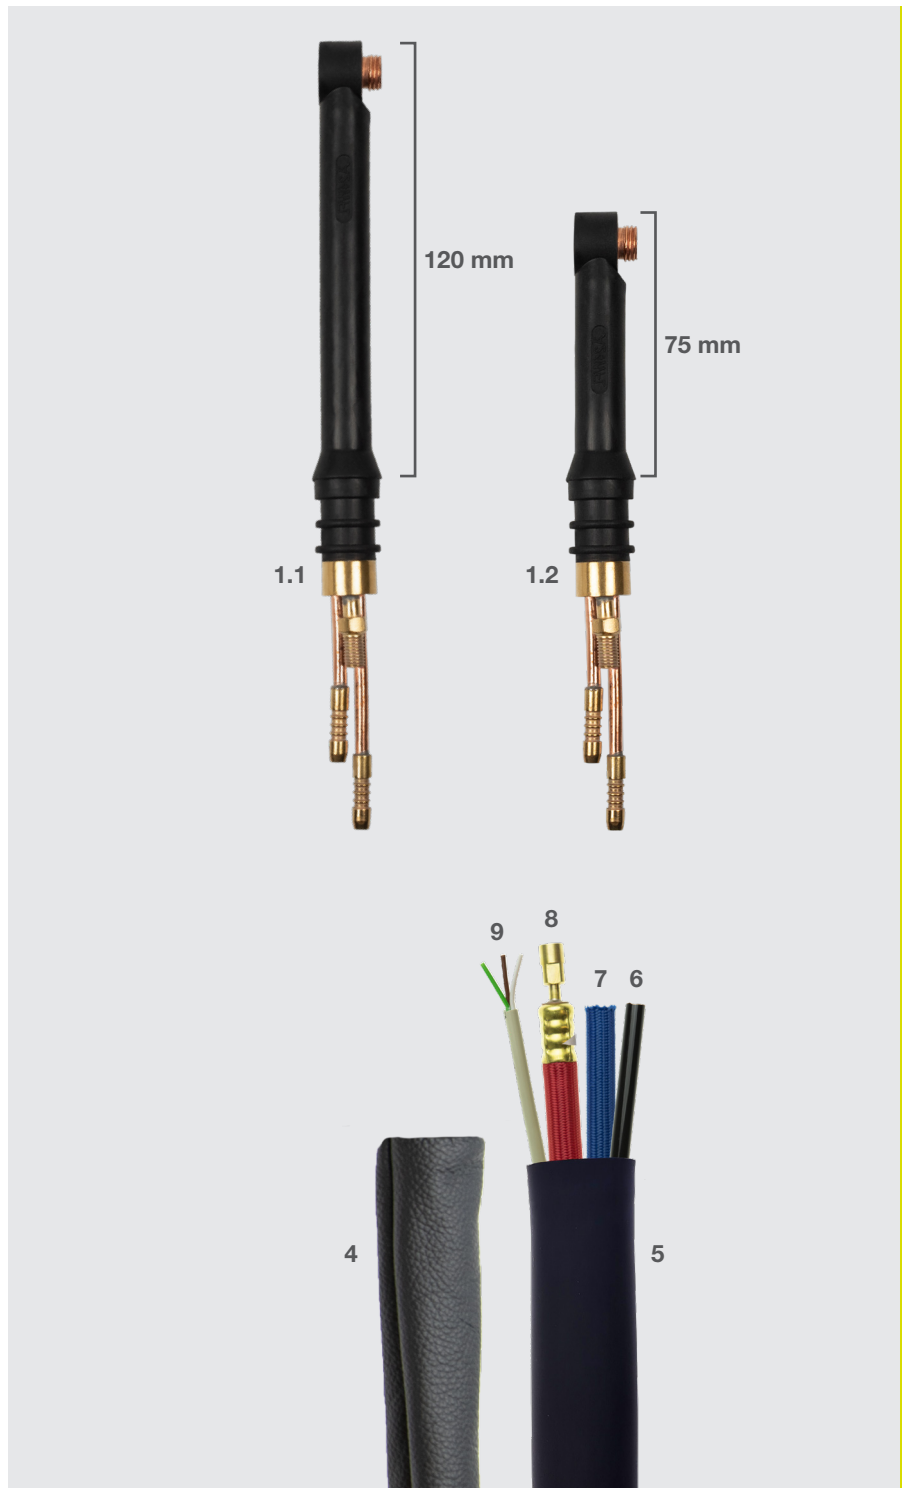

Torch Front Group

1	Torch Body incl. insulator (10)	
.1	AQ24 WFL-A 120mm	AQ24WFLA
.2	AQ24 WFS-A 75mm	AQ24WFSA

Cable Group

4	Cable cover leather	TZ-1022R-TIG
5	Cable cover 25x1.5mm	RS-25
6	Gas Hose	
	4m	45V09R-*
	4m SF	45V09R-SF-*
	8m	45V10R-*
	8m SF	45V10R-SF-*
7	Water Hose	
	4m	45V07R-*
	4m SF	45V07R-SF-*
	8m	45V08R-*
	8m SF	45V08R-SF-*
8	Power Cable	
	4m	G45V03-*
	4m SF	G45V03-SF-*
	8m	G45V04-*
	8m SF	G45V04-SF-*
9	Control	MOQ 100m
	Standard (3x0.5mm)	LIYY-3x0,5
	U/D Torches (6x0.25mm)	LIYCY-6x0,25

* Please specify machine connections e.g. 1/4, 3/8 etc.

i Handles

More information regarding our **Handles** Group on page 2.

Size	10 Insulator	11 Collet	12 Gas Lens	13 Cup #6 Ø 9.52 mm
Ø .020" (0.5 mm)	-	-	-	-
Ø .040" (1.0 mm)	-	13N21JA	45V42MS	-
Ø 1/16" (1.6 mm)	-	13N22JA	45V43MS	-
Ø 3/32" (2.4 mm)	598882M	13N23JA	45V44MS	53N60ES
Ø 1/8" (3.2 mm)	-	13N24JA	45V45MS	-